

YASHIBA[®]



——机床油泵系列——

YASHIBA MOTOR

Professional manufacture of oil pump
机床油泵 >>>




浙江亚士霸电机有限公司
Zhejiang Yashiba Electric Co., Ltd

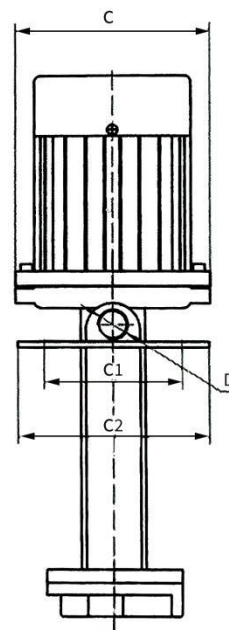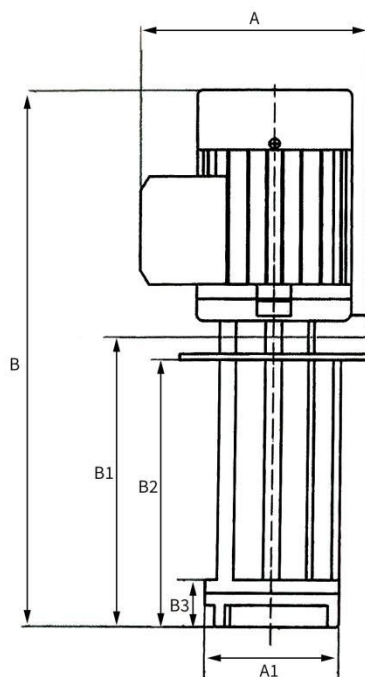

机床冷却泵系列 Machine Tool Cooling Pump

型号 Model	功率 Power (W)	电压 Voltage (V)	流量 Flow (m³/h)	扬程 Head (m)	转速 Speed (r/min)	口径 Caliber (mm)	孔径 Aperture (mm)	孔距 Hole spacing (mm)	A (mm)	A1 (mm)	B (mm)	B1 (mm)	B2 (mm)	B3 (mm)	C (mm)	C2 (mm)	D (in)	备注 Remark
DBL-90	90	220/380 (三相)	1.5	4.3	2900	20	7.5	92	155	89	332	196	180	31	131	128	1/2"	铝外壳
DBL-120	120	220/380 (三相)	1.8	4.5	2900	20	7.5	92	155	89	332	196	180	31	131	128	1/2"	铝外壳
DBL-90D	90	220 (单相)	1.5	4.5	2900	20	7.5	92	155	89	365	196	180	31	131	128	1/2"	铝外壳
DBL-120D	120	220 (单相)	1.8	4.5	2900	20	7.5	92	155	89	365	196	180	31	131	128	1/2"	铝外壳



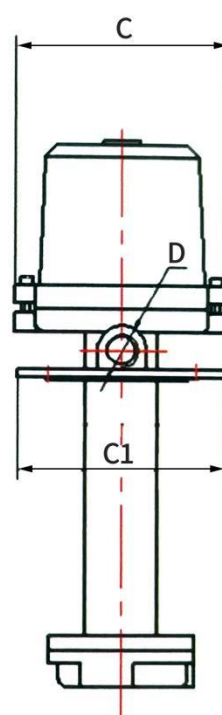

型号 Model	功率 Power (W)	电压 Voltage (V)	流量 Flow (m³/h)	扬程 Head (m)	转速 Speed (r/min)	口径 Caliber (mm)	孔径 Aperture (mm)	孔距 Hole spacing (mm)	A (mm)	A1 (mm)	B (mm)	B1 (mm)	B2 (mm)	B3 (mm)	C (mm)	C1 (mm)	D (in)	备注 Remark
DBT-1/8	90	220/380 (三相)	1.5	4.0	2850	20	7.5	91	162	89	335	210	191	31	131	117	1/2”	单叶轮 铁外壳
DBT-1/4	200	220/380 (三相)	2.5	4.5	2850	25	7.5	112	190	120	365	225	202	32	156	160	3/4”	单叶轮 铁外壳
DBT-1/2	370	220/380 (三相)	2.8	5.0	2850	25	7.5	112	190	120	365	225	202	32	156	160	3/4”	单叶轮 铁外壳






DBJ-90




DBJ-200

机床冷却泵系列 Machine Tool Cooling Pump						
型号 Model	功率 Power (W)	电压 Voltage (V)	扬程 Head (m)	流量 Flow (m³/h)	出水口 Outlet (mm)	备注 Remark
DBJ-90	90	三相220/380	4	1.5	20	石英砂泵 (带搅拌叶)
DBJ-200	200	三相220/380	4	2.8	25	石英砂泵 (带搅拌叶)

DBJ-90 尺寸图

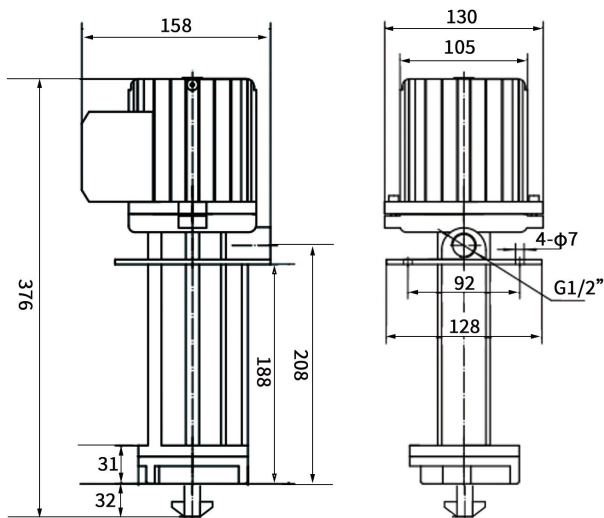

DBJ-200 尺寸图

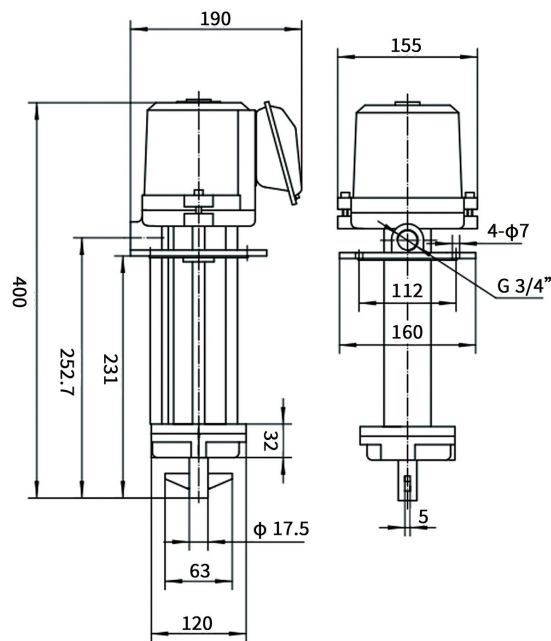



温馨提示：手工测量存在误差，具体尺寸建议以实物为准




普通三角油泵



可调式三角油泵

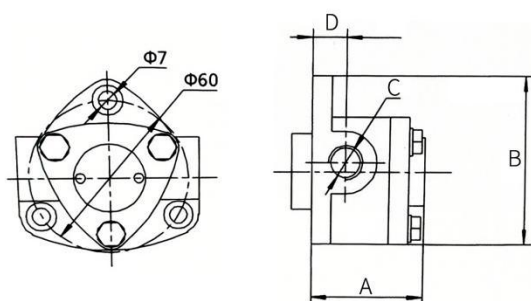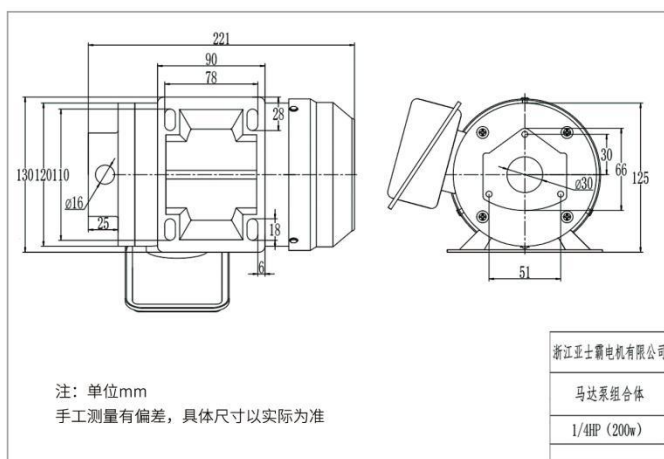

普通泵头尺寸图

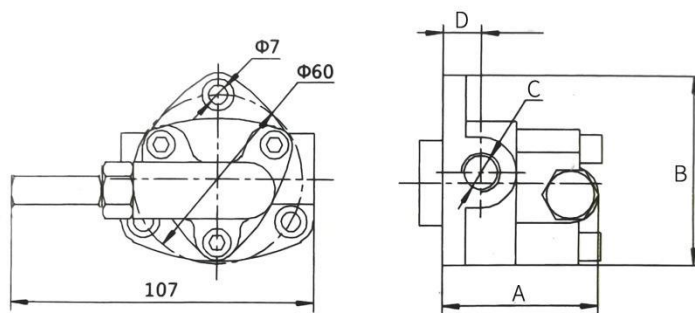

可调式泵头尺寸图

油泵泵头参数表 parameter										
型号 Model	流量Flow (L/min)		压力 Pressure (Mpa)	转速 Speed (Rpm)	重量 Weight (Kg)	口径 Caliber (mm)	A (mm)	B (mm)	C (in)	D (mm)
	1500rpm	1800rpm								
TOP-11A	2.2	2.7	0.5	2000	0.6	12	40	66.5	1/4"	11
TOP-12A	3.7	4.5	0.5	1800	0.7	12	45	65.5	1/4"	11
TOP-13A	6.7	7.5	0.5	1800	0.9	15	58	66.5	3/8"	13
TOP-11A可调式	2.2	2.7	0.5	2000	0.9	12	55	66.5	1/4"	11
TOP-12A可调式	3.7	4.5	0.5	1800	0.9	12	61	65.5	1/4"	11
TOP-13A可调式	6.7	7.5	0.5	1800	1.2	15	76	66.5	3/8"	13